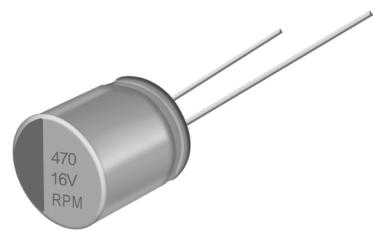


RPM Series 引线式导电聚合物固体铝电解电容器 135°C 4000 小时产品



Conductive Polymer . 135°C 4000 hours . Radial Lead Type

- 耐高电压 High voltage
- 高频低阻抗 Low ESR at high frequency range
- 高纹波 High ripple current capability
- 135°C,4000 小时 135°C,4000 hours assured

**◆主要技术性能 Specifications**

项目 Items	主要特性 Performance Characteristics	
使用温度范围 Operating Temperature Range	-55°C+135°C	
额定电压范围 Rated Voltage Range	16 ~ 80V. DC	
标称电容量允许偏差 Capacitance Tolerance	±20% (120Hz, 20°C)	
漏电流 (20°C) Leakage Current	施加额定工作电压 2 分钟 , I≤0.2 CRUR (μA) After 2 minutes application of rated voltage, the leakage current is not more than 0.2 CRUR	
损耗角正切值 (120Hz 20°C) Dissipation Factor	测试频率 120Hz/ 温度 20°C, 损耗小于规范值 Less than the specified value at 120Hz, 20°C	
等效串联电阻 Equivalent Series Resistance	测试频率 100KHz/ 温度 20°C, 等效串联电阻小于规范值 Less than the specified value at 100KHz, 20°C	
耐久性 Load Life(105°C, 2000hrs)	在 135°C环境施加额定工作电压 4000 小时后 , 电容器的特性符合下表要求。 After 4000 hours' application of rated voltage at +135°C, capacitors meet the characteristics requirements listed .	
	电容量变化率 Capacitance Change	初始值的 ±20% 以内 Within ±20% of the initial value
	漏电流值 Leakage	≤规范值 Less than the specified value
	损耗角正切值 Dissipation Factor	≤规范值的 150% Less than 150% of the specified value
	等效串联电阻 Equivalent Series Resistance	≤规范值的 150% Less than 150% of the specified value
高温贮存 Shelf Life (105°C, 1000hrs)	在 135°C环境放置 1000 小时后 , 电容器的特性符合下表要求。 After storage 1000 hours' at +135°C and then resumed 16 hours, the characteristics requirements listed .	
	电容量变化率 Capacitance Change	初始值的 ±20% 以内 Within ±20% of the initial value
	漏电流值 Leakage	≤规范值 Less than the specified value
	损耗角正切值 Dissipation Factor	≤规范值的 150% Less than 150% of the specified value
	等效串联电阻 Equivalent Series Resistance	≤规范值的 150% Less than 150% of the specified value

◆ 外形图及尺寸 Case size table

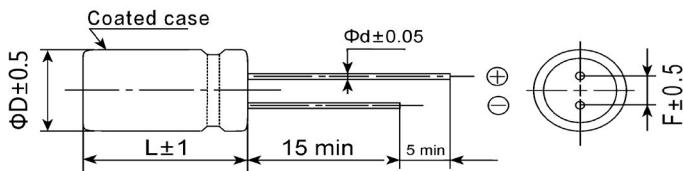

ΦD×L	ΦD	L	F	Φd
6.3×5	6.3	5	2.5	0.5
6.3×8	6.3	8	2.5	0.5/0.6
8×8	8	8	3.5	0.6
8×12	8	12	3.5	0.6
10×10	10	10	5.0	0.6
10×12	10	12	5.0	0.6

◆ 编码和规格 Part number & Specifications

额定电压 Rated Voltage (V)	标称容量 Capacitance (μF)	产品编码 Part Number	等效串联电阻 ESR(mΩ max) 100Khz to 300Khz	耐纹波电流 (mA rms/ 135°C, 100Khz)	损耗 Tanδ (120Hz)	漏电流 (max)(μA)	尺寸 ΦD×L (mm)
16	120	RPM1C121M0605	36	900	0.12	384	6.3×5
	220	RPM1C221M0608	23	1500	0.12	704	6.3×8
	220	RPM1C221M0808	30	1100	0.12	704	8×8
	470	RPM1C471M0810	17	2400	0.12	1504	8×10
	470	RPM1C471M1010	22	1900	0.12	1504	10×10
	560	RPM1C561M0812	16	2700	0.12	1792	8×12
	680	RPM1C681M1010	19	2300	0.12	2716	10×10
	1000	RPM1C102M1012	13	2500	0.12	3200	10×12
20	100	RPM1D101M0605	41	900	0.12	400	6.3×5
	150	RPM1D151M0608	25	1200	0.12	750	6.3×8
	150	RPM1D151M0808	39	800	0.12	750	8×8
	330	RPM1D331M0810	19	2300	0.12	1320	8×10
	330	RPM1D331M1010	23	1800	0.12	1320	10×10
	470	RPM1D471M0812	18	2500	0.12	1880	8×12
	560	RPM1D561M1010	20	2200	0.12	2240	10×10
	680	RPM1D681M1012	14	3000	0.12	2720	10×12
25	56	RPM1E560M0605	43	900	0.12	280	6.3×5
	100	RPM1E101M0608	27	1100	0.12	500	6.3×8
	100	RPM1E101M0808	41	800	0.12	500	8×8
	220	RPM1E221M0810	20	2300	0.12	1100	8×10
	220	RPM1E221M1010	24	1800	0.12	1100	10×10
	270	RPM1E271M0812	19	2300	0.12	1350	8×12
	330	RPM1E331M1010	20	2200	0.12	1650	10×10
	470	RPM1E471M1012	15	2900	0.12	2350	10×12
35	47	RPM1V470M0605	48	800	0.12	329	6.3×5
	68	RPM1V680M0608	31	1100	0.12	476	6.3×8
	68	RPM1V680M0808	44	800	0.12	476	8×8
	150	RPM1V151M0810	22	2200	0.12	1050	8×10
	150	RPM1V151M1010	25	1800	0.12	1050	10×10
	220	RPM1V221M0812	21	2300	0.12	1540	8×12
	270	RPM1V271M1010	20	2200	0.12	2310	10×10
	330	RPM1V331M1012	16	2800	0.12	3290	10×12

◆ 编码和规格 Part number & Specifications

额定电压 Rated Voltage (V)	标称容量 Capacitance (μF)	产品编码 Part Number	等效串联电阻 ESR(mΩ max) 100Khz to 300Khz	耐纹波电流 (mA rms/ 135°C, 100Khz)	损耗 Tanδ (120Hz)	漏电流 (max)(μA)	尺寸 ΦD×L (mm)
50	22	RPM1H220M0605	50	700	0.12	220	6.3×5
	39	RPM1H390M0608	36	900	0.12	390	6.3×8
	39	RPM1H390M0808	45	900	0.12	390	8×8
	82	RPM1H820M0810	26	2100	0.12	820	8×10
	82	RPM1H820M1010	34	1600	0.12	820	10×10
	120	RPM1H121M0812	25	2100	0.12	1200	8×12
	120	RPM1H121M1010	25	2100	0.12	1200	10×10
	180	RPM1H181M1012	19	2500	0.12	1800	10×12
63	12	RPM1J120M0605	51	700	0.12	151	6.3×5
	22	RPM1J220M0608	45	800	0.12	277	6.3×8
	22	RPM1J220M0808	48	800	0.12	277	8×8
	39	RPM1J390M0810	28	1900	0.12	491	8×10
	47	RPM1J470M1010	35	1500	0.12	592	10×10
	56	RPM1J560M0812	27	2100	0.12	705	8×12
	68	RPM1J680M1010	28	2000	0.12	857	10×10
	100	RPM1J101M1012	24	2100	0.12	1260	10×12
80	12	RPM1K120M0608	50	800	0.12	192	6.3×8
	27	RPM1K270M0810	38	1000	0.12	432	8×10
	39	RPM1K390M0812	35	1100	0.12	624	8×12
	47	RPM1K470M1010	33	1200	0.12	752	10×10
	68	RPM1K680M1012	28	1500	0.12	1088	10×12

◆ 纹波电流频率补偿系数 Frequency coefficient of allowable ripple current

频率 Frequency	120Hz ≤ f < 1KHz	1KHz ≤ f < 10KHz	10KHz ≤ f < 100KHz	100kHz ≤ f < 500KHz
系数 Coefficient	0.05	0.30	0.70	1.00

◆ 纹波电流温度补偿系数 Temperature coefficient of allowable ripple current

温度°C Temp.	+60	+70	+85	+105	+135
系数 Coefficient	1.73	1.62	1.43	1.25	1.00