

RHM Series 导电高分子混合型引线式铝电解电容器 135°C 4000 小时产品

Hybrid conductive polymer . 135°C 4000 hours . Radial Lead Type

- 混合型电解质，高耐压，长寿命，极低阻抗，135°C.4000 小时
- 性能稳定，可靠性高，符合 RoHS
- 无卤对应品
- Conductive Polymer Hybrid, high voltage, long life, low impedance, 135°C4000 hours
- High stability and reliability. RoHS Compliant
- Halogen-free product


NEW



◆ 主要技术性能 Specifications

项目 Items	主要特性 Performance Characteristics				
使用温度范围 Operating Temperature Range	-55°C+135°C				
额定电压范围 Rated Voltage Range	16 ~ 50V DC				
标称电容量允许偏差 Capacitance Tolerance	±20% (120Hz, 20°C)				
漏电流 (20°C) Leakage Current	Rated voltage		16 ~ 50V		
	Time		2 分钟 (after 2 minutes)		
	Case Size		Φ5 ~ Φ10		
	Leakage Current		≤0.01 CV (μA) 或 3μA 取较大者 ≤0.01 CV or 3μA whichever is greater		
损耗角正切值 (120Hz 20°C) Dissipation Factor	WV(V)	16	25	35	50
	tgδ	0.16	0.14	0.12	0.10
温度特性 (120Hz) Temperature Characteristics Impedance Ratio(100kHz)	WV(V)	16	25	35	50
	Z-25°C/ Z +20°C	1.5	1.5	1.5	1.5
	Z-55°C/ Z +20°C	2	2	2	2
耐久性 Load Life	+135°C 施加额定电压 4000 小时 , 恢复 16 小时后 , 电容器应满足要求 After applying rated voltage for 4000 hours at +135°C and then resumed 16 hours. The capacitor shall meet the following limits.				
	电容量变化率 Capacitance Change	≤ ±30% 初始测量值 ≤±30% of Initial measured value			
	漏电流值 Leakage Current	≤ 规定值 ≤The specified value			
	损耗角正切值 Dissipation Factor	≤ 2 倍规定值 ≤200% of the specified value			
	等效串联电阻 (ESR) Equivalent series resistance	≤ 2 倍规定值 ≤200% of the specified value			
	+135°C,1000 小时 , 恢复 16 小时后 , 电容器应满足下列要求。 After storage for 1000 hours at +135°C and then resumed 16 hours, the capacitor shall meet the following limits.				
高温贮存 Shelf Life	电容量变化率 Capacitance Change	≤ ±30% 初始测量值 ≤±30% of Initial measured value			
	漏电流值 Leakage Current	≤ 规定值 ≤The specified value			
	损耗角正切值 Dissipation Factor	≤ 2 倍规定值 ≤200% of the specified value			
	等效串联电阻 (ESR) Equivalent series resistance	≤ 2 倍规定值 ≤200% of the specified value			

◆ 外形图及尺寸 Case size table

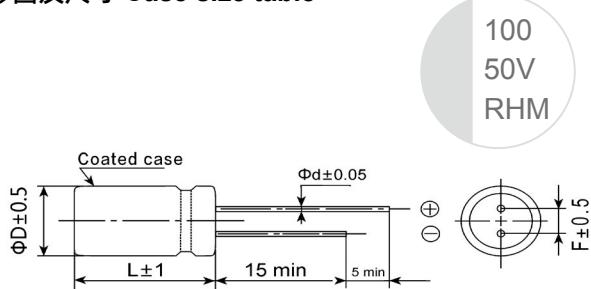

φD×L	φD	L	F	φd
6.3×6	6.3	6	2.5	0.5
6.3×7	6.3	7	2.5	0.5
8×10	8	10	3.5	0.6
10×10	10	10	5.0	0.6
10×12	10	12	5.0	0.6

◆ 标称电容量、额定电压、额定纹波电流与外形尺寸对应表

Nominal capacitance, rated voltage, rated ripple current and case size table

WV μF	16V			25V			35V			50V			63V			
	ΦD×L mm	I (mA)	ESR (mΩ)	ΦD×L mm	I (mA)	ESR (mΩ)	ΦD×L mm	I (mA)	ESR (mΩ)	ΦD×L mm	I (mA)	ESR (mΩ)	ΦD×L mm	I (mA)	ESR (mΩ)	
22														8x10	1100	40
33										8x10	1250	30	8x10 10x10	1100 1400	40 30	
47							6.3x6	900	60	8x10	1250	30	8x10	1100	40	
56				6.3x6	900	50				10x10	1600	25	10x10	1400	30	
68							6.3x7	1400	35	8x10	1250	30				
82	6.3x6	950	45										10x10 10x12	1400 2000	30 20	
100				6.3x7	1400	30				10x10	1600	25				
120										10x10 10x12	1600 2100	25 19				
150	6.3x7	1450	27				8x10	1600	27							
220				8x10	1600	27										
270	8x10	1700	22				10x10 10x12	2000 2200	20 17							
330				10x10 10x12	2200 2300	20 16										
470	10x10	2100	18													

I ~ 额定纹波电流 Rated ripple current: (mA, 135°C, 100kHz), ESR: (mΩ, 20°C, 100kHz)